


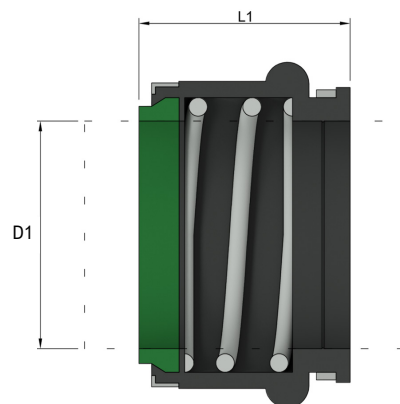

TECHNICAL SPECIFICATIONS

TEMPERATURE -20,0 °C à 90,0 °C
-4,0 °F à 200,0 °F

PRESSURE Up to 6 bar
Up to 87 psi

SPEED Up to 6,8 m/s
Up to 1340 ft/m

FEATURES External elastomer bellows
Single internal spring
Resistant to soiling and tangling

STATIONNARY SEAT D1
D2

MATERIALS

ROTATIVE FACE Tungsten Carbide

ELASTOMER Nitril
FKM

METAL PARTS Stainless Steel

SPRING Stainless Steel

STATIONNARY FACE Silicon Carbide

	D1	L1	D3	L2
5/8"	0,625	0,886	1,187	0,394
1-1/8"	1,125	1,106	1,750	0,433
1-1/2"	1,500	1,378	2,125	0,433
2 "	2,000	1,783	2,750	0,500